AD-A141 435   AIRCRAFT TRAFFIC DENSITY IN THE LOS ANGELES BASIN(U)   1/
             MITRE CORP MCLEAN VA METREK DIV   N A SPENCER AUG 83
             MTR-83W00091 DOT/FAA/PM-83/21 DTFA01-82-C-10003

UNCLASSIFIED   F/G 1/2   NL

END
DATE
FILMED
7 84
DTIC

MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

AD-A141 435

AIRCRAFT TRAFFIC DENSITY IN THE LOS ANGELES BASIN

N. A. SPENCER

The MITRE Corporation
McLean, Virginia 22102

AUGUST 1983

DTIC
ELECTE
MAY 2 5 1984

A

Prepared for

DTIC FILE COPY

84   05   24   002

1. Report No.	2. Government Accession No.	3. Recipient's Catalog No.
DOT/FAA/PM-83/21	AD-A141 435	

4. Title and Subtitle	5. Report Date
Aircraft Traffic Density in the Los Angeles Basin	August 1983
	6. Performing Organization Code

7. Author's)	8. Performing Organization Report No.
N. A. Spencer	MTR-83W00091

9. Performing Organization Name and Address	10. Work Unit No. (TRAIS)
The MITRE Corporation	
Metrek Division	11. Contract or Grant No.
1820 Dolley Madison Blvd	DTFA01-82-C-10003
McLean, VA 22102	13. Type of Report and Period Covered

12. Sponsoring Agency Name and Address	
Department of Transportation	
Federal Aviation Administration	
800 Independence Avenue, S.W.	14. Sponsoring Agency Code
Washington, D.C. 20591	APM-300

15. Supplementary Notes

16. Abstract

An estimate of the number of aircraft flying in the Los Angeles basin was made using airborne and ground-based radar measurements. These estimates are combined with FAA projections of traffic growth to predict the future aircraft density as seen by an airborne Traffic Alert and Collision Avoidance System (TCAS). Results include the findings that (a) peak density decreases approximately linearly with radius, (b) the number of aircraft increases linearly with the sum of tower operations, (c) for year 2000, within a radius of 5 nmi, the projected maximum density is 0.45 aircraft/nmi^2, the projected maximum number of aircraft is 35, and the projected maximum number of ATCRBS aircraft is 20, and (d) within a radius of 10 nmi, these figures are 0.24, 75, and 43, respectively.

17. Key Words	18. Distribution Statement
Los Angeles Basin, Air Traffic Density, Instantaneous Airborne Count, TCAS	Document is available to the public through the National Technical Information Service, Springfield, Virginia 22151

19. Security Classif. (of this report)	20. Security Classif. (of this page)	21. No. of Pages	22. Price
Unclassified	Unclassified		

Form DOT F 1700.7 (8-72)   Reproduction of completed page authorized

ACKNOWLEDGEMENT

Accession For

NTIS GRA&I	☑
DTIC TAB	☑
Unannounced	☐
Justification	

By

Distribution/

Availability Codes

Dist	Avail and/or Special
A-1	

iii

TABLE OF CONTENTS

1. INTRODUCTION

This report describes the method used to obtain an estimate of
the aircraft density in the Los Angeles airspace, both for the
present time and well into the future. The need for these
estimates arose from the requirement to specify the airborne
environment for the Traffic Alert and Collision Avoidance System
(TCAS), so that the system could operate in all airspace.

The Los Angeles basin represents the most severe region in the
United States in terms of airborne traffic density and extent,
and has traditionally been used as a standard against which to
judge whether systems will survive the load. Earlier models of
traffic have become outmoded and inaccurate; at the same time
available instrumentation for measuring the airborne traffic has
been improving. Accordingly, the FAA, together with substantial
assistance from the U.S. Air Force, undertook steps to obtain a
new estimate of the airborne environment in the Los Angeles
Basin and a forecast of how it will change in the future.

Models of aircraft traffic can take many forms. The most
comprehensive would provide a moment-by-moment picture of every
aircraft for an extended period of time. Such a dynamic model
has been used in the past for many purposes; however, creating
such a model again would require resources well beyond those
presently available. Instead, it was realized that with
reasonable resources the primary TCAS requirements could be
satisfied with a simpler model, which would focus only on
aircraft density.

2. BACKGROUND

In 1969 the Air Traffic Control Advisory Committee (ATCAC) of
the Department of Transportation provided a major analysis of
the air transportation system, and arrived at a number of
important conclusions which have influenced the course of the
system ever since (Reference 1). In the ATCAC report, an
estimate was made of the traffic in the Los Angeles basin (120
nmi x 120 nmi centered on the Los Angeles airport as in the
outlined box of Figure 2-1), but there were few details as to
the actual spatial distribution of the aircraft.

In 1972 the FAA Technical Center undertook a coordinated survey
of the towers in the Los Angeles basin (Reference 2). From this
survey they produced a model of the approximate flight profiles
during typical high activity periods. The MITRE Corporation
then combined that baseline data together with growth in
operations, as forecast by the FAA, to produce a number of
different models for different years (References 3 and 4). For
example, the baseline data indicated 495 aircraft in the basin
in 1972; a projection to 1982 indicated 804 aircraft; and a
projection to 1995 indicated 1840 aircraft.*

In 1976, while the Mode S sensor (formerly denoted DABS,
Discrete Address Beacon System) was being developed, M.I.T.
Lincoln Laboratory assembled a transportable Mode S sensor,
called the Transportable Measurement Facility (TMF). Data was

---

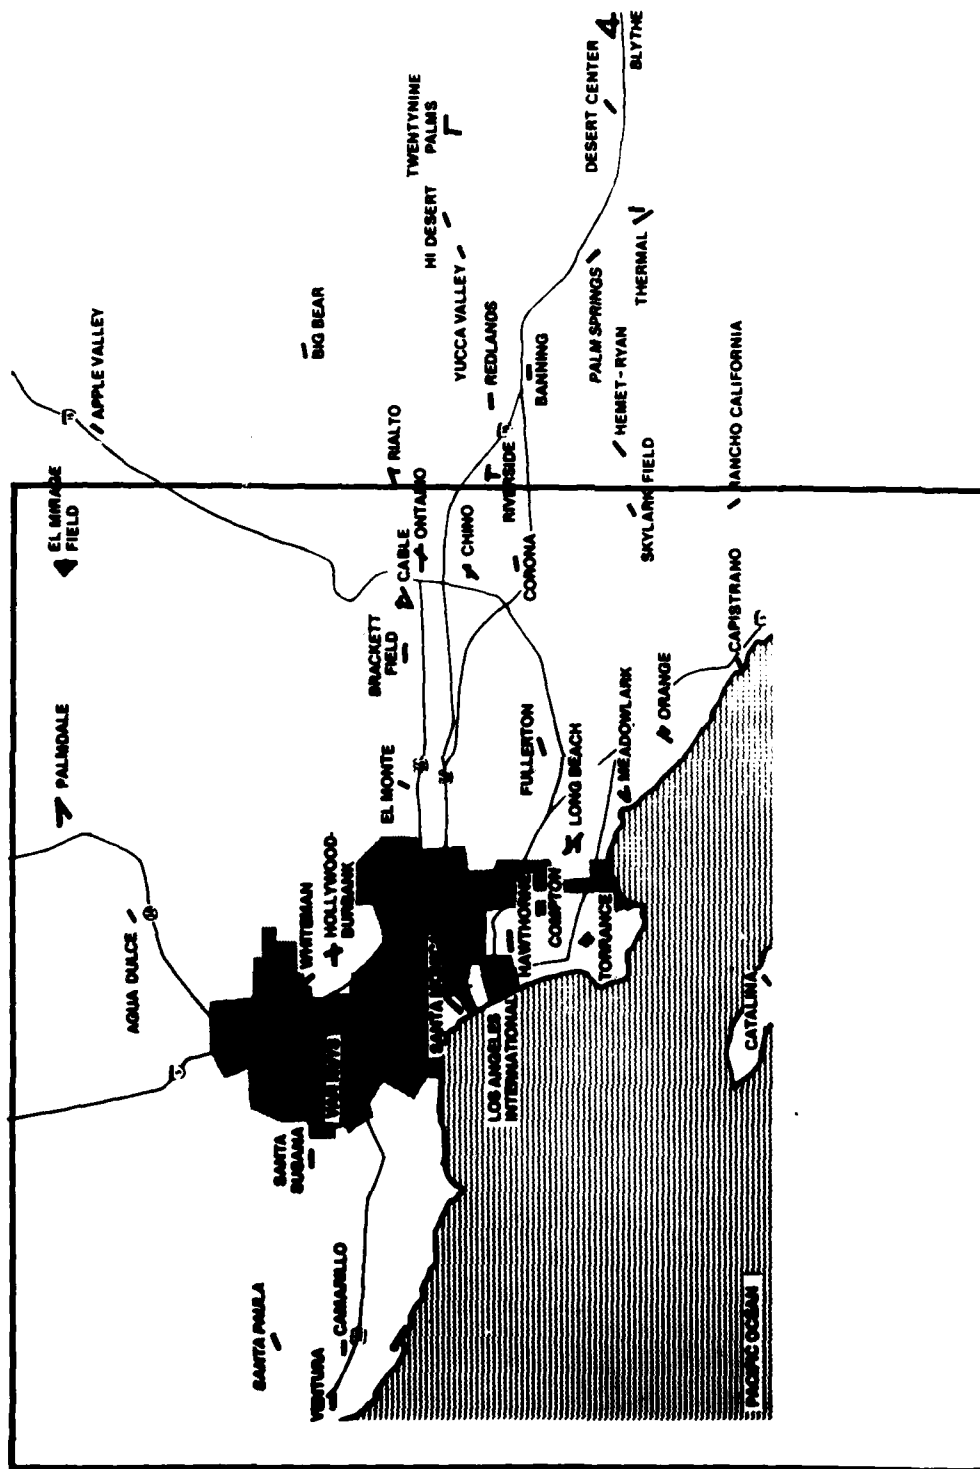* Note: These numbers varied somewhat for different "snapshots".

FIGURE 2-1
THE LOS ANGELES BASIN

collected at various places around the country, including Los
Angeles (Reference 5). There, it was found that the average
value of the instantaneous airborne count (IAC) was about 160
beacon equipped aircraft within a range of 60 nmi of the TMF --
there was no way of knowing the number of non-beacon equipped
aircraft. The TMF data also provided important observations on
the actual distribution of aircraft -- a great improvement over
any distribution inferred from the 1972 survey. From the TMF
data, the peak measured density of beacon equipped aircraft
within a 10 nmi radius circle was .10 aircraft per square
nautical mile.

By 1981 it was recognized that both the forecasts and the
baseline figures used in the models made in 1972 should be
reassessed. This was so not only because it was 10 years later,
but also because of the fuel embargos and the wide-body
revolution in aircraft design. Since ongoing work still
required traffic models, but no new baseline had been produced,
the 1972 model was modified by correcting for the actual growth
that was known to have occurred between 1972 and 1981, using the
current FAA projection to the year 1995. That was the basis for
the model which was called LAX-1100 (Reference 6).

As the development of the airborne Traffic Alert and Collision
Avoidance System (TCAS) required an up-to-date estimate of the
projected traffic density, an initiative was undertaken early in
1982 to obtain a new baseline of the present level of traffic in
the Los Angeles Basin. This information was needed to aid in
setting standards which had to account for such things as
specifying an adequate size of track file, providing for garble
processing, and assessing the impact of automatic interference
limiting measures.

2-3

3. APPROACH TO A NEW MODEL OF TRAFFIC DENSITY

It was decided to build the new model on the basis of airborne surveillance measurements, which was expected to provide a substantial improvement over the best previous means, the 1972 survey. While the airborne measurements are ideal for detecting beacon equipped aircraft (the coverage is not blocked by terrain features), it is not as effective for non-beacon equipped aircraft (it must compete with ground clutter and with ground vehicle clutter). Accordingly, the fraction of non-beacon aircraft was estimated from special recordings of ground Air Traffic Control radars. Thus, the total Instantaneous Airborne Count (IAC) was determined by a combination of both airborne data (beacon aircraft) and ground based data (non-beacon aircraft).

The time of the measurements was arranged to be near the peak traffic of the day. However, the day-to-day activity varies and this factor had to be taken into account. The measure used for activity is the sum of the daily operations count collected for every tower in the basin. The approach to obtaining an estimate of the peak density is therefore, first to measure the IAC, then to account for peak day activity by using the daily operations count, and finally to project to a future year by using the yearly operations count as forecast by the FAA. A complicating factor -- the air traffic controller's strike of 1981 -- also had to be taken into account.

4. AIRBORNE SURVEILLANCE DATA

Through the cooperation of the U.S. Air Force, airborne
surveillance data was gathered in the vicinity of Los Angeles
and, as a comparison, in the vicinity of New York City. Table
4-1 shows the local conditions for the four Los Angeles flights
and for one New York flight. The flights were scheduled and
coordinated principally by the U.S. Air Force Liaison Officer
attached to the FAA Office of System Engineering Management.

Data was scheduled to be collected during the expected high
activity periods of the day. This was for the most part
successful. Aircraft activity as measured by operations
recorded at some of the towered airports confirmed this.
Examples of the hourly data are shown in Appendix A. In general
the weather was good, only one day having periods of light
showers (11 March).

The measurements typically lasted for about one-half hour to one
hour, during which a continuous stream of target reports on
beacon aircraft was recorded. These reports included the
positions of all detected aircraft in latitude, longitude, and
altitude. Further, they provided the time, Mode A code, Mode A
and Mode C validity status, and several other parameters.

The data was transcribed to nine-track tapes at the U.S. Air
Force facility and sent to the FAA Technical Center. There they
were preprocessed by the Data Engineering and Development
Division for the Engineering Management Staff. The resulting
tapes were then sent both to the FAA Office of System
Engineering Management, where a "quick-look" was conducted
(Reference 7 for example) and subsequent flights planned, and to
the MITRE facility where the detailed analysis being reported
here was conducted.

TABLE 4-1
LOCAL CONDITIONS DURING DATA COLLECTION FLIGHTS

PLACE	LOCAL CONDITIONS
Los Angeles	15 December 1981 Tuesday, 1100 local time 5 mile visibility
	11 March 1982 Thursday, 1600 local time light rain 7 mile visibility
	3 June 1982 Thursday 1400 local time 10 mile visibility
	23 Jul 1982 Friday 400 local time 12 mil visibility
New York	9 July 1982 Friday, 1300 local time 10 mile visibility

At MITRE, the data was then processed to retain only those
target reports lying within a 120 nmi square centered on the Los
Angeles airport (LAX), and they were divided into scan
intervals. A typical plot of the number of beacon reports per
scan is shown in Figure 4-1, both for those aircraft reporting
Mode C altitude (called Mode C aircraft) and for those aircraft
not reporting Mode C (called non Mode C). For each flight, a
time was chosen when the number of beacon reports was both high
and consistent -- this became the base scan for further analysis.

In the base scan there are instances of spurious reports, which
should not be attributed to aircraft, as well as occurrences of
missing reports. The process used to reveal real aircraft was
to plot sequential scans, after the base scan, for an interval
of about one minute. When a string of sequential reports lined
up, that indicated the presence of an aircraft, and the target
report in the base scan was either retained, discarded, or a new
one was added according to whether an aircraft was present or
not. Figure 4-2 shows such a plot, with the arrows indicating
the presence of an aircraft. When several aircraft are in a
close cluster, such as near the zero-zero point over Los Angeles
airport, the consequences of synchronous garble often appear.

With the base scan thus manually "cleaned up", we have some
assurance that the target reports are valid. Figure 4-3 shows
the result for the 3 June flight, where the squares indicate
Mode C aircraft and the plus signs indicate non-Mode C
aircraft. Initially, these were a total of 189 beacon aircraft;
after cleanup this dropped to 179 beacon aircraft. The
concentration of aircraft near the Los Angeles airport,
especially along the Long Beach -- Los Angeles -- Van Nuys
corridor is apparant, as is the lack of aircraft over the ocean
and over the mountains. The scale of these plots is the same as
that of the map in Figure 2-1; the Los Angeles airport is the
large cross at the midpoint of the plot.

72901. INITIAL TIME

Base Scan

FIGURE 4-1
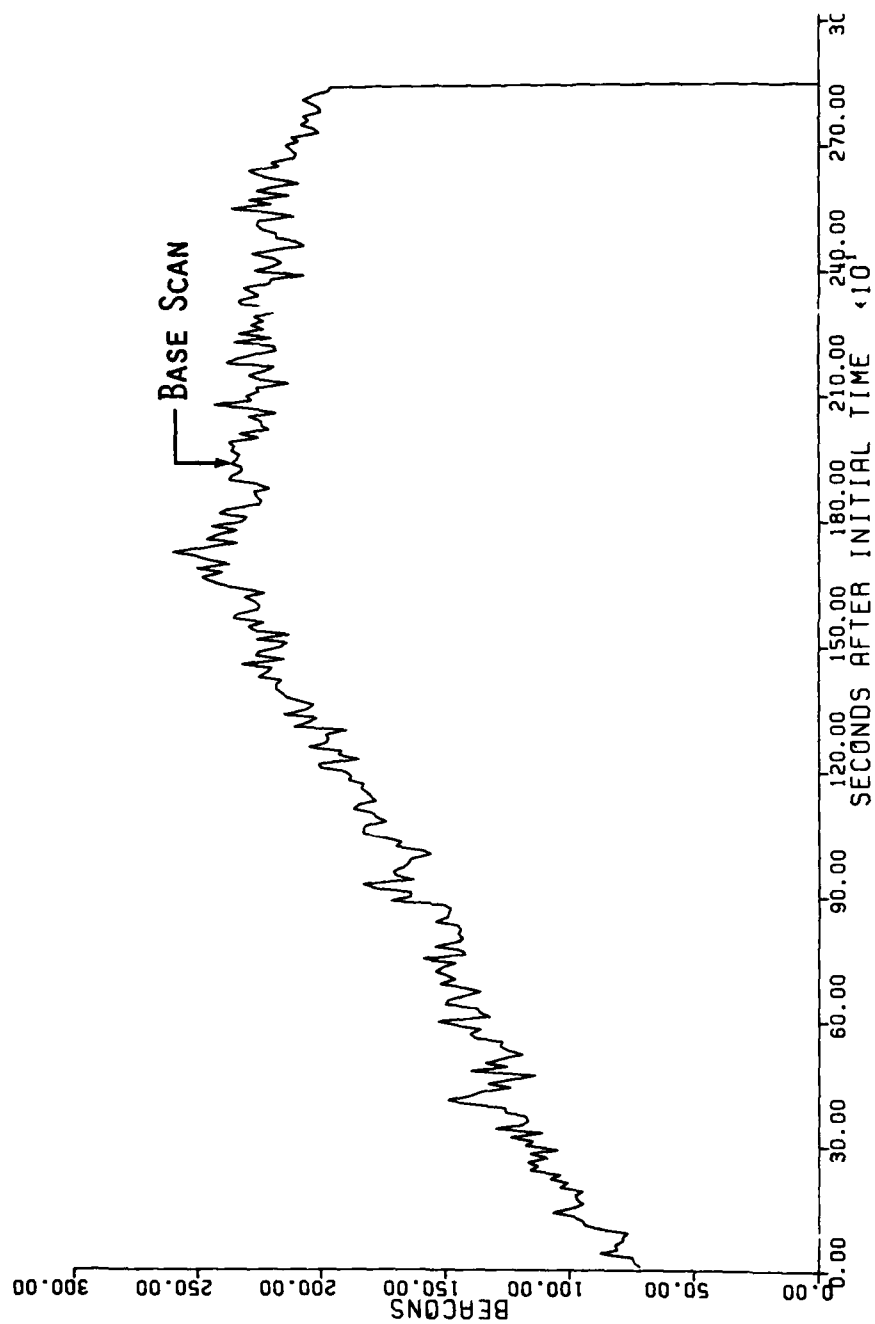**BEACON REPORTS PER SCAN**
(23 JULY 1982)

SECONDS AFTER INITIAL TIME

BEACONS

4-4

3 June 1982
Time Zero = 71474 s
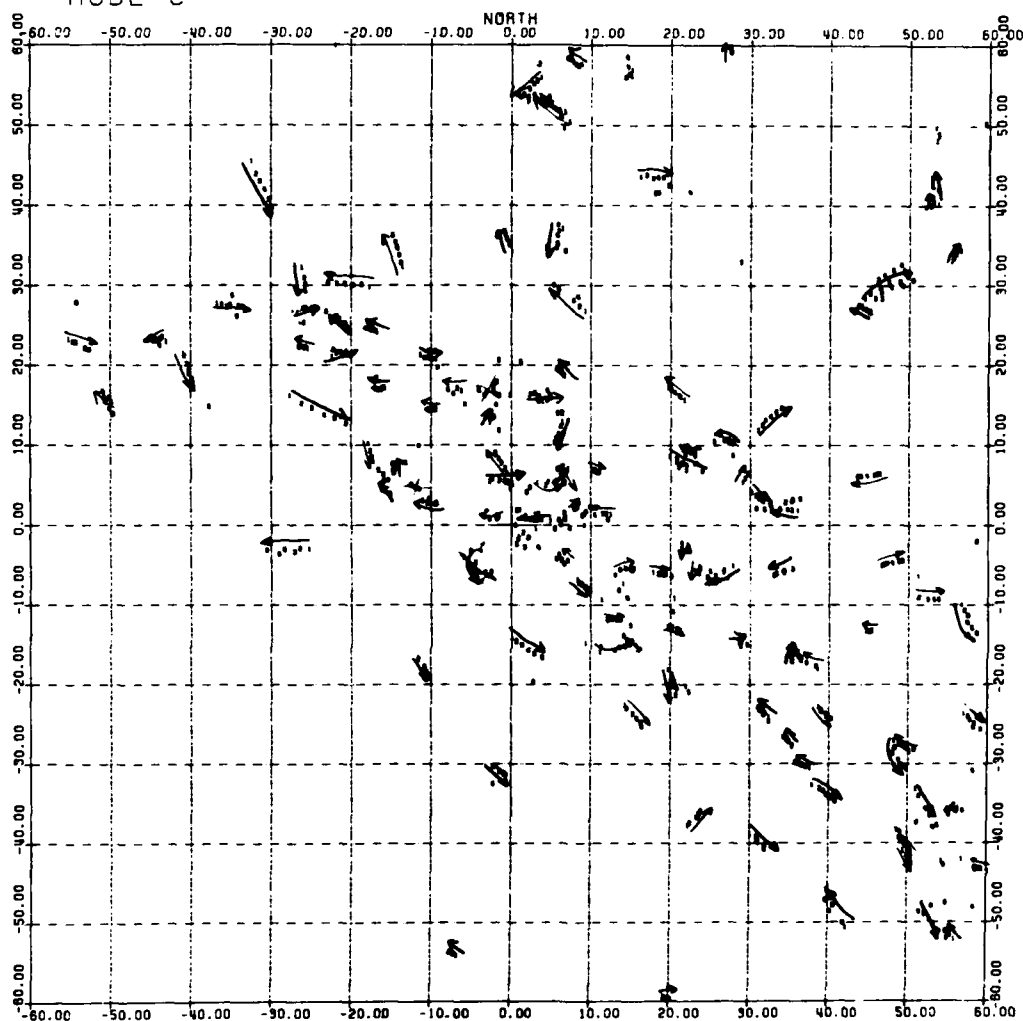
MODE C

FIGURE 4-2
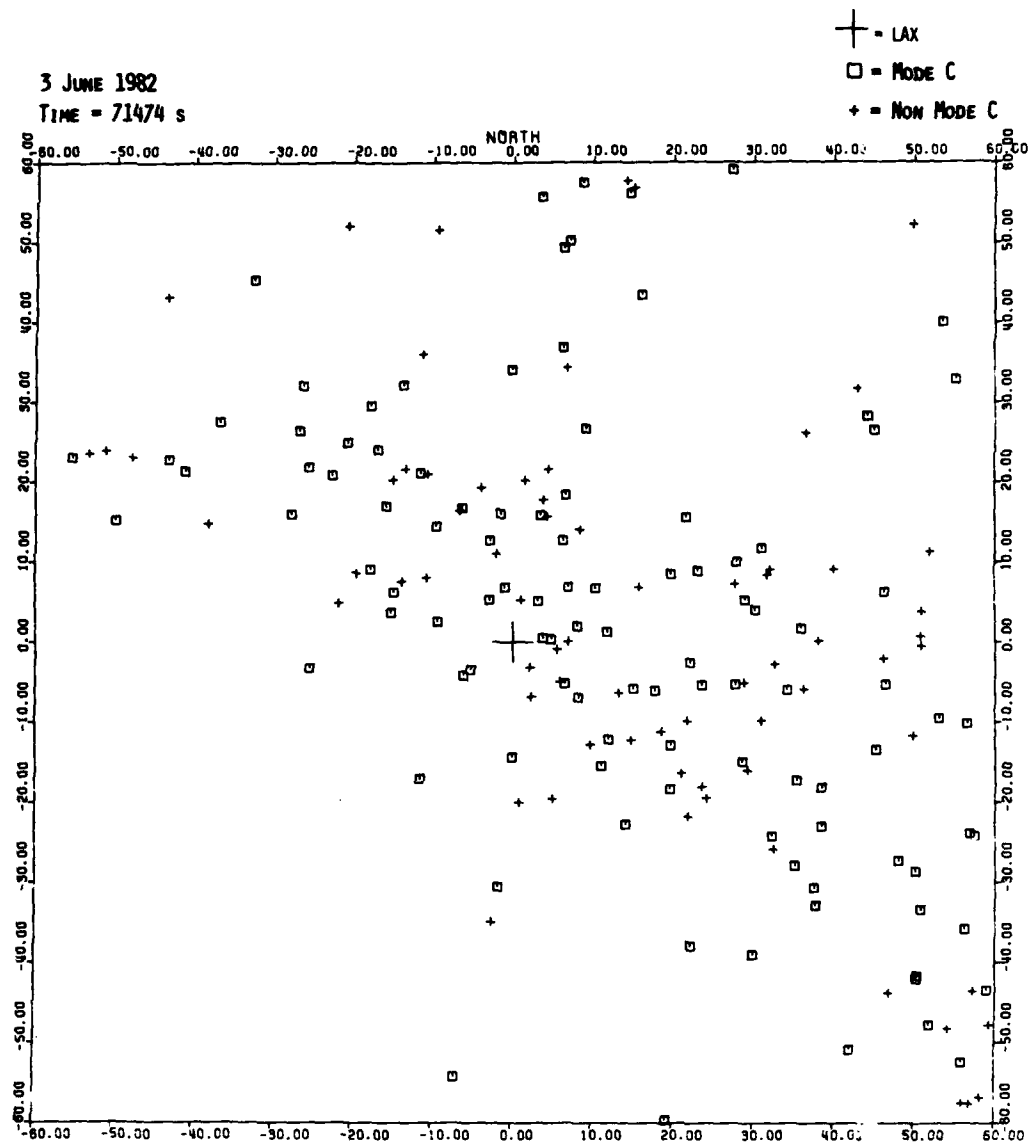**SEQUENTIAL STRINGS OF TARGET REPORTS**

4-5

FIGURE 4-3
POSITIONS OF BEACON AIRCRAFT

4-6

Having the locations of beacon aircraft, we can now analyze the
density of the Los Angeles basin by dividing it into a square
grid of 5 nmi boxes as in Figure 4-4. There, every number
represents the number of beacon aircraft within that particular
5 nmi x 5 nmi box. A square "cell" will be defined as an area
having a "radius" (the radius of the inscribed circle), and the
number of aircraft within that square cell will be determined
from Figure 4-4. For example, in Figure 4-4, the total number
of aircraft in the entire Basin, a square cell of 60 nmi radius,
is 179. The number of aircraft in the most dense 10 nmi radius
square cell (dotted outline) is 23. This process was continued
for a variety of square cell sizes, each time finding the
location of the cell of highest density and noting the number of
aircraft in it.

When all four Los Angeles flights were thus treated, and plotted
as in Figure 4-5, it was found that they could be adequately
characterized by the simple relation given there. The relation
applies very well at a cell radius of about 10 nmi, and with
fair but conservative accuracy at a radius of 5 nmi. The value
of having this heuristic relation is that one formula averages
all of the variations that existed over the four flights: the
specific aircraft localities, and the many operational
conditions (takeoff, cruise, IFR, etc.) The peak density in any
given size cell is seen to be directly proportional to the IAC
of the entire Los Angeles basin. This enables one to take the
average of a large amount of data, rather than to use directly
only a small amount of data in a localized area. The nearly
linear variation of the number of aircraft with radius (exponent
is 1.1) is quite different from that for a uniform random
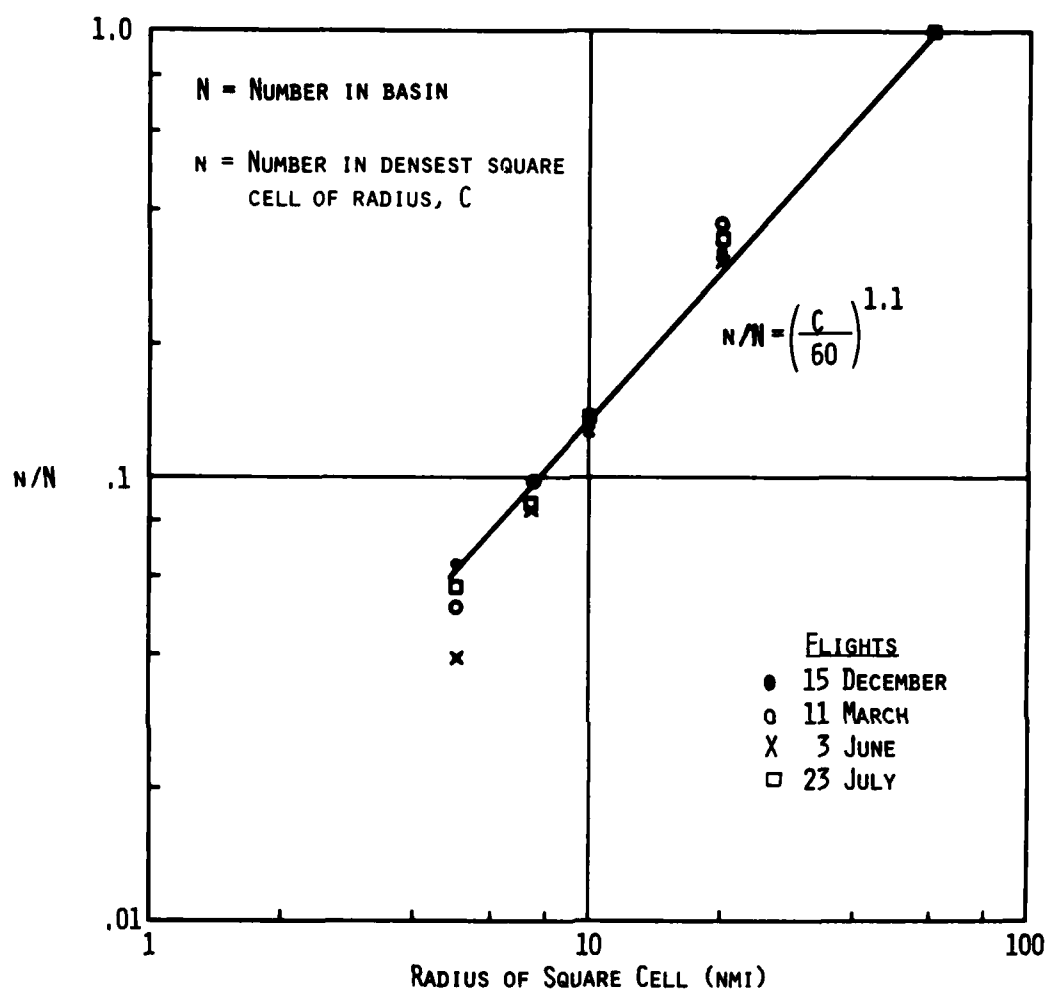distribution, which would follow a square law instead.

FIGURE 4-4
AIRCRAFT DISTRIBUTION

4-8

FIGURE 4-5
RELATIVE DISTRIBUTION OF AIRCRAFT AT LOS ANGELES

4-9

While the number of aircraft within a given surveillance radius is the important physical parameter for TCAS design, the associated density parameter is convenient to use when characterizing the airspace. Figure 4-6 converts the data of Figure 4-5 into density -- that is, density of aircraft in the maximum density square cell of the given radius. The curve cannot be extrapolated below a square cell radius of 5 nmi because of the technique of analysis; however, for radii greater than 5 nmi, the maximum density in a square cell is nearly inversely proportional to radius. Thus, the maximum density within 10 nmi of an aircraft is about one-half of that within 5 nmi.

It is to be noted that the highest density actually measured within a 5 nmi radius square cell was .18, and within a 10 nmi radius square cell it was .07, both of these measurements were on 23 July 1982. This latter measurement is comparable with the 1976 measurement of maximum density with the TMF, which varied from .08 to .10 within a 10 nmi circular radius.

The relation shown in Figure 4-5 is one of the important results of this study. However, other inferences can also be drawn from the results of the four LAX flights. About 68 percent of the beacon aircraft were reporting Mode C. (If the data from the marginal day of 11 March were excluded, the fraction would drop to 63 percent.) This is a significant increase from the 45 percent found in 1976 during the TMF tests, and corresponds more closely with the results found when the TMF was moved to Washington and Philadelphia. It was also found that about one-half of the aircraft were squawking code 1200, and about one-half of those were Mode C. This is depicted in Table 4-2.

The altitude distribution of the Mode C aircraft is shown in Figure 4-7. About 50 percent of these aircraft reported below 5,000 ft, 75 percent below 10,000 ft, and 90 percent below 20,000 ft.

4-10

DENSITY IN 5 NMI RADIUS SQUARE CELL EQUALS
AIRCRAFT IN BASIN DIVIDED BY 1539

DENSITY IN 10 NMI CELL IS 1/2 THAT OF
5 NMI CELL

$\rho/\rho_5 = 1/(C/5)^{.9}$

RADIUS OF SQUARE CELL (NMI)

DENSITY RELATIVE TO THAT IN 5 NMI RADIUS
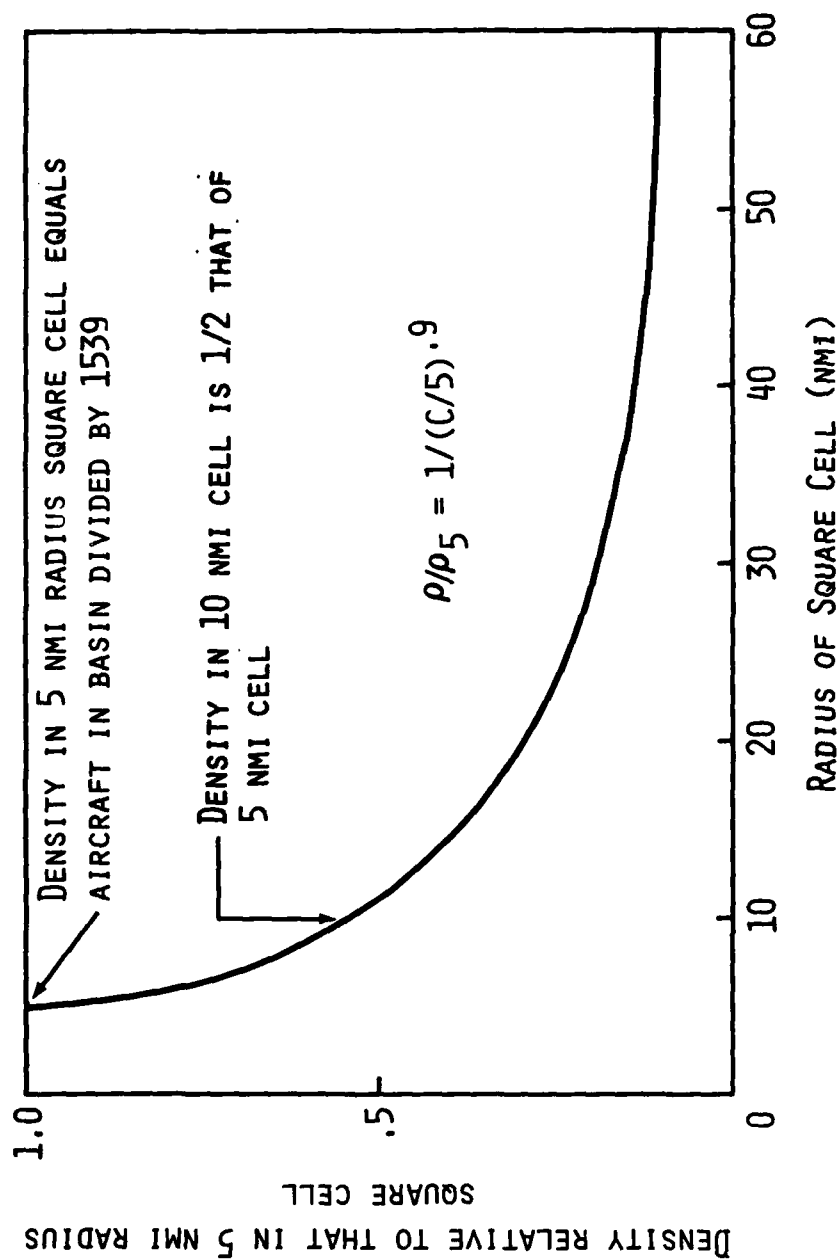SQUARE CELL

FIGURE 4-6
VARIATION OF DENSITY WITH CELL RADIUS

4-11

TABLE 4-2

SOME CHARACTERISTICS OF THE LOS ANGELES BEACON ENVIRONMENT

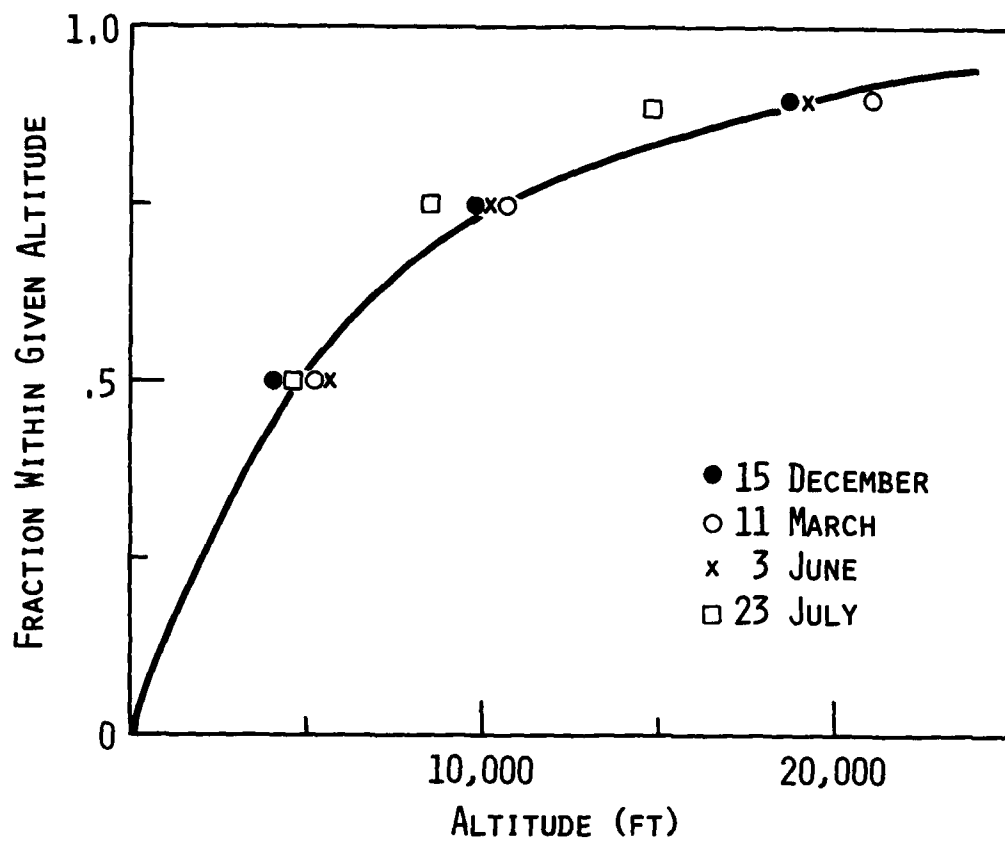|	MODE C	NON MODE C	TOTAL
FRACTION SQUAWKING CODE 1200	.23	.24	.47
FRACTION SQUAWKING OTHER CODES	.45	.08	.53
TOTAL	.68	.32	1.00

FIGURE 4-7
ALTITUDE DISTRIBUTION OF MODE C AIRCRAFT

5. GROUND BASED SURVEILLANCE DATA

The airborne surveillance data was used to determine the IAC of
beacon aircraft, both Mode C and non-Mode C. To obtain an
estimate of the number of aircraft flying without transponders,
an analysis was made of a common digitizer (CD) recording, which
was obtained by the FAA Western Region from the San Pedro long
range radar, just a few miles away from the Los Angeles
airport. This tape was reformatted by the Automation
Engineering Division at the FAA Technical Center and then sent
to MITRE for further analysis.

Since the ground based radar does not have an unobstructed view
of the whole basin, we cannot use it to check the entire IAC,
but within its surveillance view we can determine the fraction
of aircraft having operating transponders to the total
population (with transponders and without transponders).

The CD recording was made on 23 July approximately two hours
earlier than the airborne measurement. While the two
measurements were not at exactly the same time, they both
occurred around the busy midday peak, and so can be considered
to be samples of the same population. Although this
circumstance is not ideal, any error should be small, and it
will be seen that the impact on TCAS is minimal.

The same technique of observing correlatable strings of reports
is used as for the airborne data. In this case, however,
unassociated radar reports were plotted as well as all beacon
reports. Since unassociated radar reports include all the radar
clutter, the correlation process is considerably more
difficult. Table 5-1 shows the end result of this process.

TABLE 5-1
AIRCRAFT SEEN BY SAN PEDRO RADAR

TYPE	NUMBER
Mode C	91
non-Mode C	62
Total Beacon	153
Radar	27
Total Aircraft	180

Date: 23 July 1982
Time: 1136 (local)

There were 153 beacon targets and 27 non-beacon targets. This gives us the rule that the total IAC is 1.18 times the beacon IAC.

Another use which can be made of the ground data is to cross-check the airborne beacon data. Accordingly, a grid similar to Figure 4-4 was made. The number of aircraft within the peak 5 nmi radius square cell and within the peak 10 nmi radius square cell agreed with those from the airborne data within one aircraft. This close correspondence, together with the self consistency among the four airborne measurements increases confidence in the overall series of measurements.

6. IS LOS ANGELES UNIQUE?

Having made the measurements of IAC in the Los Angeles basin and having developed some level of confidence in them, it is reasonable to ask if that locality is similar to others or is it so unusual that it is different in kind? To explore that question, several flights were scheduled in the vicinity of New York City. One of these, 9 July, was briefly analyzed to examine the density characteristics. For this analysis the step of visual correlation was omitted. That is, the beacon data for the selected scan was used as it came, recognizing that there would be some extraneous reports as well as missing reports. Other ground based data and operations data were recorded as well for possible future use.

As a result of this analysis it was found that the New York area has roughly similar characteristics to that of Los Angeles. Figure 6-1 is a plot of the New York beacon data. The variation of number of aircraft with radius follows a 1.2 power relation rather than the 1.1 power of Los Angeles. This results in slightly lower densities for a local area when a given number of aircraft are in a large area (e.g. 120 nmi x 120 nmi).

Thus the measured traffic in Los Angeles appears to be representative of other places in the country, although it has a somewhat higher density.
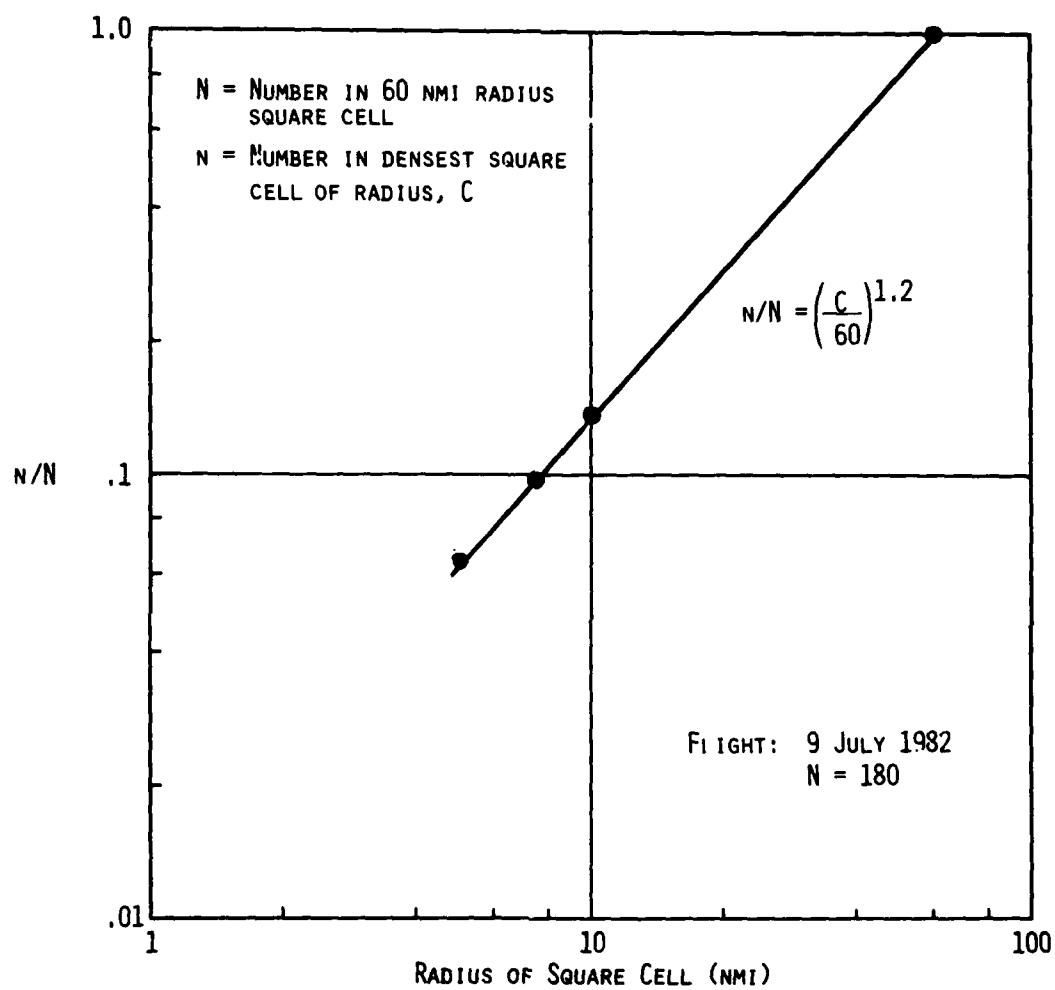
FIGURE 6-1
RELATIVE DISTRIBUTION OF AIRCRAFT IN NEW YORK

7. UTILIZATION OF TOWER OPERATIONS DATA

Although the variation of density with distance was consistent
from day to day, each of the four day's flights had a different
IAC, corresponding to different activity for that day. The next
step in this analysis was to determine a way to account for
these varying levels of activity.

The approach used here is to obtain daily operations data from
each of the 17 towers in the Los Angeles basin, and to use the
sum of these operations as an indicator of aviation activity.
The FAA Western Region and the Office of Aviation Policy and
Plans provided this information for the dates of the flights as
well as for an extended period of time in the past. Appendix A
shows the list of towered airports as well as examples of some
of the data collected during the program.

Figure 7-1 shows the measured beacon IAC plotted with the sum of
the tower operations in the basin. The four measurements are
plotted, and an average line is drawn through them. The
measured slope of the average line is 180 beacon IAC for every
10,000 operations. Since the total IAC includes both beacon and
non beacon aircraft, the 1.18 factor from Section 5 should be
included. This makes the expected total IAC 212 for every
10,000 total tower operations.

It can be seen that the scatter about the average line is fairly
tight, being about the same level as the variation in hourly
operations. This provides a fair degree of confidence that the
variation in IAC can be represented by the variation in the
daily operations count. The next step is simply to apply this
information to the historical operations count so that we can
estimate the peak IAC on the busiest day of the year.
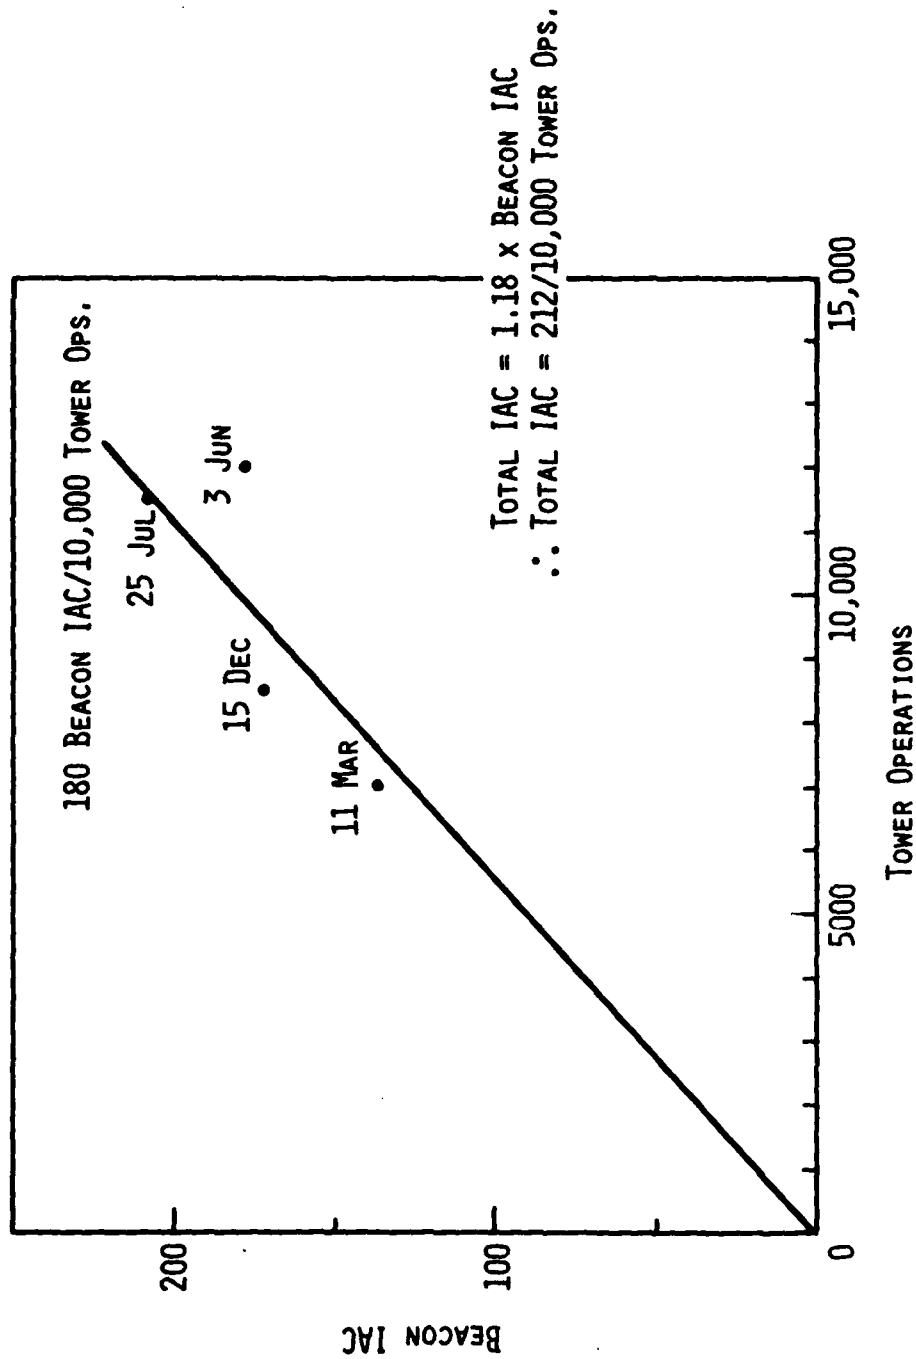
FIGURE 7-1
VARIATIONS OF IAC WITH OPERATIONS

180 Beacon IAC/10,000 Tower Ops.

Total IAC = 1.18 x Beacon IAC
∴ Total IAC = 212/10,000 Tower Ops.

Tower Operations

Beacon IAC

Figure 7-2 is a plot of the total daily tower operations for
1980 through the period of measurement. With the exception of a
short gaps in the data base, the plot is pretty much what would
be expected. The most outstanding feature is the sharp drop of
operations in August 1981, when air traffic controllers went on
strike. Because of this action, and because of the downturn of
the economy in 1981, the peak day in 1981 was below normal.
Accordingly, the peak day in 1980 is chosen to represent "the
present time".

To make this correction, we use the 212 IAC per 10,000
operations just determined, and multiply that by the total tower
operations (16,868) for the peak day, 19 January 1980. The
computed peak total IAC for the peak day in 1980 is 358 aircraft
in the Los Angeles basin.
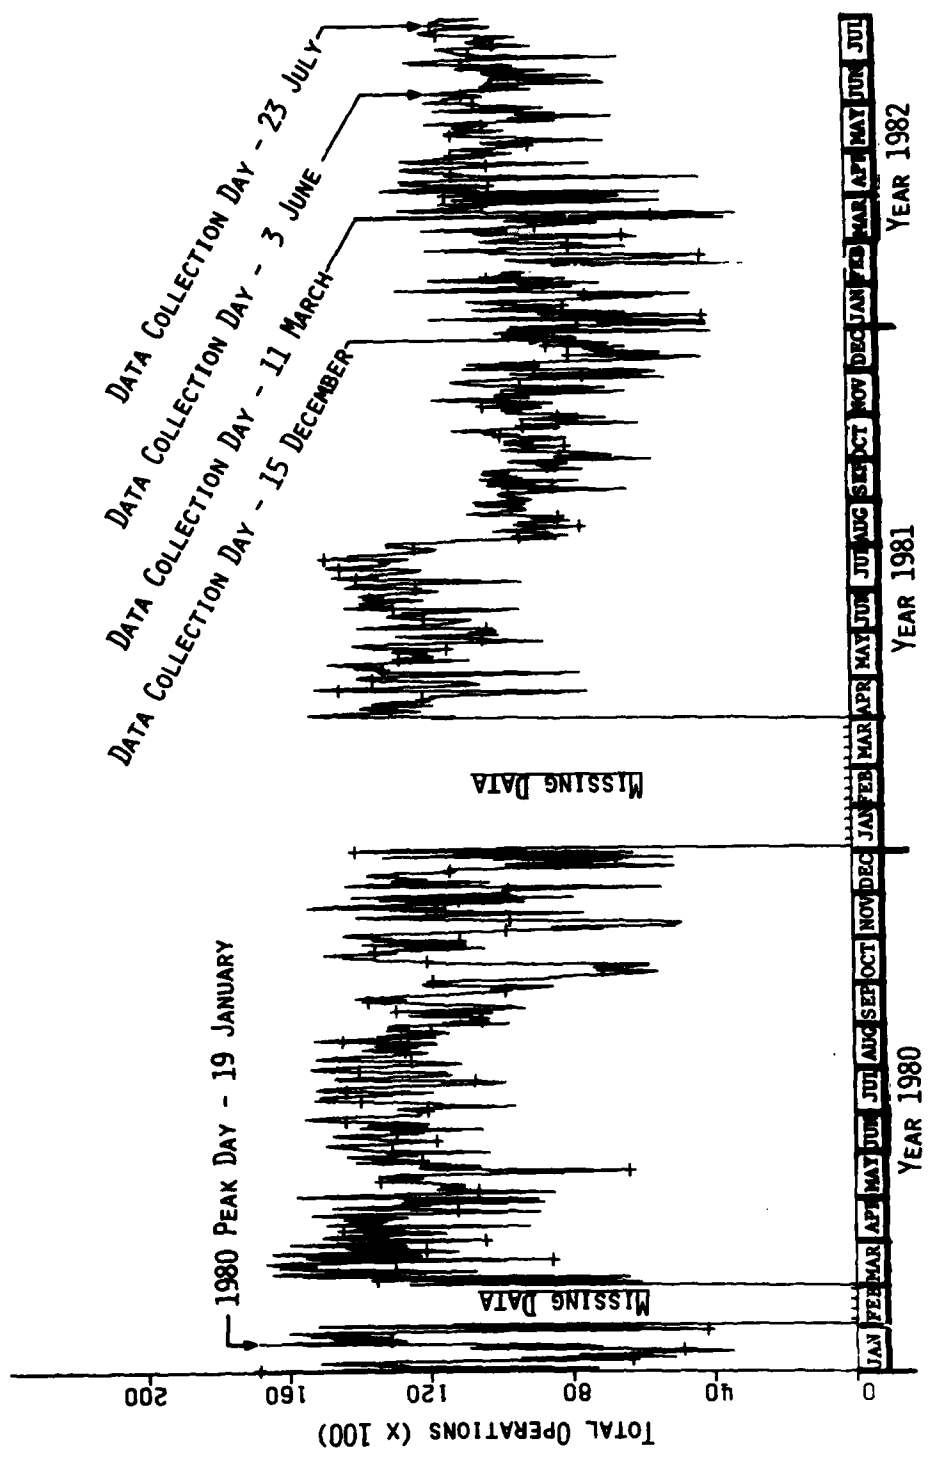
FIGURE 7-2
LOS ANGELES BASIN TOWERS DAILY OPERATIONS

7-4

8. FUTURE GROWTH PROJECTIONS

Having found the variation of density with distance together
with the peak IAC, we have the required characterization of the
airborne environment for the current period of time. To obtain
a forecast of the environment into the future, we will use the
annual operations forecast for towered airports.

Table 8-1 is a list of yearly operations supplied by the FAA
Office of Aviation Policy and Plans. In addition, the IAC just
computed for 1980 is shown, and is scaled for the succeeding
years by the ratio of annual operations. The overall projected
growth from 1980 to 2000 averages to 3.5% per year, starting
slowly and gaining in the last decade. It is noted that the
forecast peak IAC is only about 50 percent of the value used in
the LAX-1100 model for 1995. This confirms the need that was
recognized at the start of this project -- to redefine the
baseline figures.

TABLE 8-1
FUTURE GROWTH PROJECTIONS

YEAR	ANNUAL OPERATIONS AT TOWERED AIRPORTS IN THE L.A. BASIN	IAC
1980	5.07 Million	358
1985	5.50	388
1990	6.40	452
1995	7.90	558
2000	9.73	687

9. ESTIMATES OF AIRBORNE ENVIRONMENT OVER TIME

In order to be useful for the TCAS design, the airborne
population must be divided into three classes: ATCRBS
transponders, Mode S transponders, and no transponders. The
preceding section gave the basis for obtaining the total IAC
over time; this section will break out the three classes.

Three scenarios will be developed to characterize equipage. The
first scenario will be called the Baseline Scenario. This
postulates a middle-of-the-road deployment of Mode S
transponders. The second scenario is a more aggressive one,
(Agressive Scenario) and the third scenario delays
implementation by five years (Delayed Scenario). These employ
differing assumptions about the rate of Mode S deployment; the
total number of transponders is the same for all three
scenarios. The assumptions are as follows:

1. Baseline Scenario

    a. The number of non-transponder aircraft remains constant
        until 1990, and then decreases linearly to zero by year
        2000.

    b. The number of ATCRBS transponders continues to grow
        until 1985, and thereafter remains constant at that
        level.*

---

*ATCRBS transponders could be further subdivided into Mode C and non-
Mode C for this exercise, but TCAS is planned to track both, so the
distinction will not be made here.

c. The number of Mode S transponders (all are assumed to be altitude reporting) starts from zero in 1985 and accounts for all increases in transponder equipage thereafter.

2. Aggressive Scenario

a. Non-transponders: the same as Baseline

b. ATCRBS transponders: the same as Baseline until 1990, and then decreases linearly to zero in year 2000.

c. Mode S transponders: the same as Baseline until 1990, and then replaces all ATCRBS by year 2000, as well as accounting for all growth.

3. Delayed Scenario

a. Non-transponders: the same as Baseline

b. ATCRBS transponders: continue to grow until 1990, and thereafter remain constant at that level.

c. Mode S transponders: starts from zero in 1990 and accounts for all increases in transponder equipage thereafter.

These scenarios are depicted in Figure 9-1 and in Table 9-1 for the forecast IAC of the Los Angeles basin. The total IAC numbers come from Table 8-1 of the preceding section.
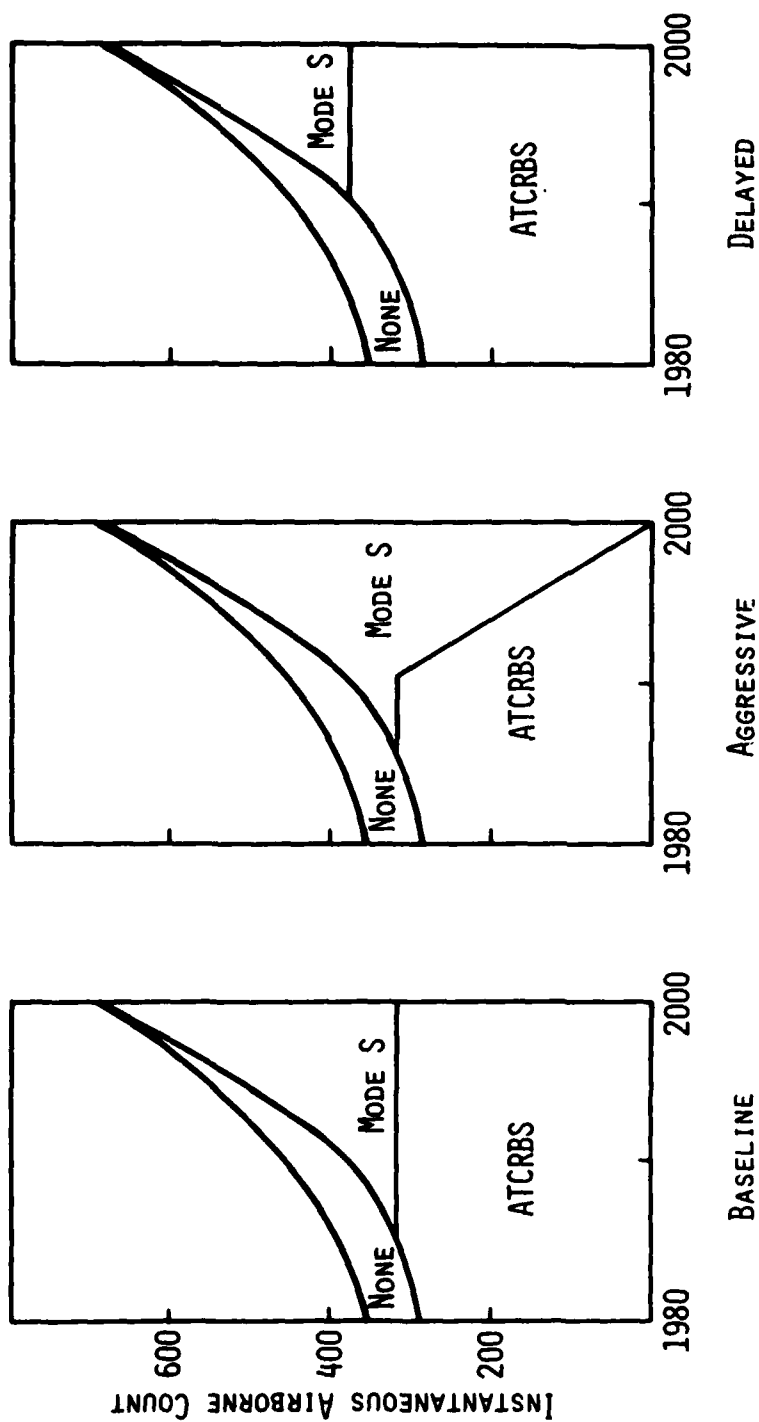
FIGURE 9-1
TRANSPONDER EQUIPAGE SCENARIOS

TABLE 9-1
LOS ANGELES ENVIRONMENT

SCENARIO	YEAR	TOTAL IAC	ATCRBS	MODE S	NO TRANSPONDER
Baseline	1980	358	303	0	55
	1985	388	333	0	55
	1990	452	333	64	55
	1995	558	333	197	28
	2000	687	333	354	0
Aggressive	1980	358	303	0	55
	1985	388	333	0	55
	1990	452	333	64	55
	1995	558	167	363	28
	2000	687	0	687	0
Delayed	1980	358	303	0	55
	1985	388	333	0	55
	1990	452	397	0	55
	1995	558	397	133	28
	2000	687	397	290	0

Having the total IAC, the equipage breakdown, and the
distribution of aircraft with distance, we are finally able to
obtain the results that are most meaningful for the TCAS
design. These are presented in Tables 9-2, 9-3, 9-4.

The densities in a 5 nmi radius square cell and a 10 nmi radius
square cell are presented for each of the three scenarios,
showing the densities of all aircraft -- ATCRBS equipped
aircraft, Mode S equipped aircraft, and non-transponder
aircraft. These figures describe the airspace. Possibly more
interesting values, however, are obtained by converting the
handy but not-too-meaningful "density" figures into "number of
aircraft". This is done in the last four columns for a circular
region about the TCAS aircraft in the most dense location. For
example, in the year 2000, a five-mile system in the most dense
Los Angeles environment should be able to track at least 35
aircraft; whereas, a 10-mile system should be able to track 75
aircraft. Assuming the Delayed Scenario, the largest number of
ATCRBS tracks that should be handled for a 5-mile system is 20,
and for a 10-mile system, 43. (See Table 9-4.) It is to be
noted that the number of ATCRBS tracks to be handled is
independent of the measurement made of non-transponder aircraft
since, under the assumptions, these aircraft ultimately equip
with Mode S transponders.

TABLE 9-2

TCAS ENVIRONMENT FOR BASELINE SCENARIO

X	Year	DENSITY WITHIN SQUARE CELL OF RADIUS X				NUMBER OF AIRCRAFT WITHIN CIRCULAR RADIUS X			
		Total	ATCRBS Equipped	Mode S Equipped	Not Equipped	Total	ATCRBS Equipped	Mode S Equipped	Not Equipped
5 nmi	1980	.23	.20	0	.03	18	15	0	3
	1985	.25	.22	0	.03	20	17	0	3
	1990	.29	.22	.04	.03	23	17	3	3
	1995	.36	.22	.13	.01	28	17	10	1
	2000	.45	.22	.23	0	35	17	18	0
10 nmi	1980	.12	.10	0	.02	39	33	0	6
	1985	.14	.12	0	.02	42	36	0	6
	1990	.16	.12	.02	.02	49	36	7	6
	1995	.19	.12	.06	.01	61	36	22	3
	2000	.24	.12	.12	0	75	36	39	0

TABLE 9-3

TCAS ENVIRONMENT FOR AGGRESSOVE SCENARIO

X	Year	DENSITY WITHIN SQUARE CELL OF RADIUS X				NUMBER OF AIRCRAFT WITHIN CIRCULAR RADIUS X			
		Total	ATCRBS Equipped	Mode S Equipped	Not Equipped	Total	ATCRBS Equipped	Mode S Equipped	Not Equipped
5 nmi	1980	.23	.20	0	.03	18	15	0	3
	1985	.25	.22	0	.03	20	17	0	3
	1990	.29	.22	.04	.03	23	17	3	3
	1995	.36	.11	.24	.01	28	8	19	1
	2000	.45	0	.45	0	35	0	35	0
10 nmi	1980	.12	.10	0	.02	39	33	0	6
	1985	.14	.12	0	.02	42	36	0	6
	1990	.16	.12	.02	.02	49	36	7	6
	1995	.19	.06	.12	.01	61	18	40	3
	2000	.24	0	.24	0	75	0	75	0

TABLE 9-4

TCAS ENVIRONMENT FOR DELAYED SCENARIO

		DENSITY WITHIN SQUARE CELL OF RADIUS X				NUMBER OF AIRCRAFT WITHIN CIRCULAR RADIUS X			
X	Year	Total	ATCRBS Equipped	Mode S Equipped	Not Equipped	Total	ATCRBS Equipped	Mode S Equipped	Not Equipped
5 nmi	1980	.23	.20	0	.03	18	15	0	3
	1985	.25	.22	0	.03	20	17	0	3
	1990	.29	.26	0	.03	23	20	0	3
	1995	.36	.26	.09	.01	28	20	7	1
	2000	.45	.26	.19	0	35	20	15	0
10 nmi	1980	.12	.10	0	.02	39	33	0	6
	1985	.14	.12	0	.02	42	36	0	6
	1990	.16	.14	0	.02	49	43	0	6
	1995	.19	.14	.04	.01	61	43	15	3
	2000	.24	.14	.10	0	75	43	32	0

10. SUMMARY AND CONCLUSIONS

From a family of four surveillance flights in the Los Angeles
basin, it was found that a relatively consistent relation exists
between the number of airborne aircraft in the entire basin and
the number in the most dense localized area. The highest
localized density of transponder equipped aircraft actually
measured was 0.18 aircraft per square nautical mile, within a
square cell of 5 nmi radius. The density was found to vary
approximately inversely with radius. From measurements made
with a ground radar, the fraction of non-transponder aircraft
was estimated. The total aircraft population in the Los Angeles
basin today appears to be approximately 1.18 times the
transponder equipped population.

It was also found that, over the range of variation encountered,
the peak instantaneous airborne count of aircraft in the Los
Angeles basin is directly proportional to the number of daily
operations recorded at all towers within the basin. Using this
information, together with FAA projections extending to year
2000, the predicted peak density that might be encountered is
estimated to be 0.45 aircraft per square nautical mile within a
square cell radius of 5 nmi, an extrapolation of about three
times the maximum measured density of today. Within a square
cell radius of 10 nmi, the predicted value drops down to 0.24
aircraft per square nmi. The location of the highest density
region is along the line from Long Beach to Los Angeles to Van
Nuys, where the traffic from these three highly active airports
is concentrated.

With various assumptions made for aircraft transponder equipage, the maximum number of ATCRBS equipped aircraft that a TCAS would encounter is less than 43 within a 10 nmi circle, and less than 20 within a 5 nmi circle.

These values of peak density and numbers of aircraft represent an upper bound estimate for three reasons. First, evidence of aircraft saturation was not observed, so no account was made of it in the model. It may be expected that with increased operations, congestion of the airspace will ultimately place a limit on the maximum density. The second factor is that the growth in operations was modelled as occurring uniformly over all classes of the present mix of aircraft. If the mix of aircraft changes more to uncontrolled general aviation, for instance, they may increase the population of the outlying regions of airspace more than the dense regions. Third, all new aircraft in the model are assumed to have transponders. If this is not so, the density of transponder equipped aircraft will be less than predicted here.

APPENDIX A
SAMPLES OF OPERATIONS DATA USED IN THE ANALYSIS

The following tables present samples of data collected from
towers in the Los Angeles basin. The list of towers is given in
Table A-1. A sample of the daily operations summary data is shown
in Table A-2. Table A-3 shows a special logging of hourly
operations conducted at each of the towers. Table A-4 is a copy of
the standard data log of Los Angeles tower (this is the only hourly
data routinely collected in the area).

TABLE A-1
LIST OF TOWERS IN THE LOS ANGELES BASIN

Burbank

Chino

El Monte

Fullerton

Hawthorne

Long Beach

Los Angeles

Ontario

Palm Dale

La Vern

Brackett

Riverside

Santa Monica

Santa Anna

Orange City

Torrence

Van Nuys

TABLE A-2
DAILY OPERATIONS FOR LONG BEACH TOWER

FEDERAL AVIATION ADMINISTRATION
PREPARED BY APO-130 -- P302
DAILY OPERATIONS BY TOWERS
FOR SELECTED DATES

LOCID	YEAR	MONTH	DAY	AIR CARRIERS OPERATIONS	AIR CARRIER PERCENT	AIR TAXIS OPERATIONS	AIR TAXI PERCENT	GENERAL AVIATION OPERATIONS	GENERAL AVIATION PERCENT	MILITARY OPERATIONS	MILITARY PERCENT	TOTAL OPERATIONS
LGB	82	01	25	13	1	3	0	1655	99	4	0	1675
LGB	82	01	26	11	1	9	1	1699	98	7	0	1726
LGB	82	01	27	11	1	11	1	1833	99	2	0	1857
LGB	82	01	28	10	1	11	1	1235	98	0	0	1256
LGB	82	01	29	15	1	16	1	1490	98	0	0	1516
LGB	82	01	30	11	1	6	0	1497	99	6	0	1524
LGB	82	01	31	9	1	6	0	1580	99	0	0	1596
LGB	82	02	01	8	0	12	1	1616	99	16	1	1647
LGB	82	02	02	13	1	10	1	1643	99	0	0	1663
LGB	82	02	03	13	1	9	0	1759	98	0	0	1818
LGB	82	02	04	11	1	17	1	1676	98	4	0	1702
LGB	82	02	05	10	1	7	1	1616	98	0	0	1644
LGB	82	02	06	14	1	9	0	1349	99	15	1	1381
LGB	82	02	07	11	1	9	1	1606	98	0	0	1629
LGB	82	02	08	7	1	5	0	1422	98	6	0	1444
LGB	82	02	09	7	1	11	0	1403	98	16	1	1437
LGB	82	02	10	9	3	8	1	211	93	8	0	226
LGB	82	02	11	12	1	5	0	1555	98	1	0	1560
LGB	82	02	12	11	1	17	1	1669	98	0	0	1698
LGB	82	02	13	6	0	14	1	1417	98	0	0	1444
LGB	82	02	14	9	1	9	1	635	96	15	0	650
LGB	82	02	15	7	1	29	2	1148	96	12	1	1201
LGB	82	02	16	10	0	19	3	693	93	12	0	719
LGB	82	02	17	8	0	16	1	1654	98	3	0	1639
LGB	82	02	18	14	1	15	1	1946	98	2	0	1952
LGB	82	02	19	9	0	11	1	1797	98	3	0	1832
LGB	82	02	20	10	0	10	1	1574	98	2	0	1602
LGB	82	02	21	7	0	16	1	1477	97	2	0	1496
LGB	82	02	22	7	0	23	1	1087	98	2	0	1115
LGB	82	02	23	8	0	17	1	1701	98	6	0	1730
LGB	82	02	24	8	1	17	1	1642	98	3	0	1668
LGB	82	02	25	14	1	17	1	1743	99	3	0	1773
LGB	82	02	26	6	1	13	1	1606	99	3	0	1630
LGB	82	02	27	8	1	20	1	1803	93	0	0	1837
LGB	82	02	28	6	1	12	1	903	98	0	0	921
LOCID TOTAL				2723	1	4171	1	519712	93	1305	0	527911
LOCID AVERAGE				143.3		219.5		27353		58.7		27785

A-3

TABLE A-3
HOURLY OPERATIONS FOR LONG BEACH TOWER

FEDERAL AVIATION ADMINISTRATION								WESTERN REGION	
HOURLY TRAFFIC COUNT									
FACILITY: Long Beach Tower					DATE: 6/2/82				
HOUR	ITINERANT					LOCAL			GRAND
LOCAL TIME	AIR CARRIER	AIR TAXI	CIVIL	MIL	TOTAL	CIVIL	MIL	TOTAL	TOTAL
0000-0100									
0100-0200									
0200-0300									
0300-0400									
0400-0500									
0500-0600									
0600-0700									
0700-0800									
0800-0900									
0900-1000									
1000-1100	1	2	35	2	40	64	0	104	291
1100-1200	0	3	33	0	36	131	0	167	458
1200-1300	0	0	41	3	44	41	0	85	543
1300-1400	0	1	43	0	44	25	0	69	612
1400-1500	0	1	69	0	70	54	0	54	736
1500-1600									
1600-1700									
1700-1800									
1800-1900									
1900-2000									
2000-2100									
2100-2200									
2200-2300									
2300-0000									

ALTIMETER

29.96
29.97
29.97
29.95
29.94

WE Form 7210-14(8-71) (Replaces WE 7210-9 & WE 7232-2)

A-4

TABLE A-4
HOURLY OPERATIONS FOR LOS ANGELES TOWER
(Performance Measurement System)

FACILITY: LAX TWR DATE: 6-2-82

TIME LOCAL/GMT	PT'S	EPS	TOTAL INTFD ACTUAL	MODIFIED DEMAND	ACTUAL ARR/DEP	OAG SCHED ACFT ARR/DEP	ACTUAL GARNL ARR/DEP	RUNWAY CONFIG LOCATION ARR/DEP	DELAYS ARR MINS/FAC	DELAYS DEP MINS/FAC	FACTORS RELATED TO PERFORMANCE, CAUSE FOR DELAYS	INITIALS
0700 1400		104	78 ✓	97	36 42	43 42	6 6	25 9/04		1	Low Demand	SM
0800 1500	76	"	100 ✓	108	44 56	45 61	13 8	"		1	Low Demand	RM
0900 1600	85	"	88 ✓	89	31 56	55 59	5 6	"		21 9	6 DCT JFK, NAT FLOW, LOCAL FLOW	RM
1000 1700	86	"	90 ✓	103	52 38	35 44	13 7	"		1	Low Demand	SM
1100 1800	81	"	84 ✓	81	44 40	58 34	6 3	"		1	NAT Flow	RM
1200 1900		"	90 ✓	77	48 42	35 6	6 7	"		1	Low Demands	RM
1300 2000	87	"	90 ✓	103	43 47	41 49	7 5	"		25 1	DCT JFK	RM
1400 2100	89	"	92 ✓	76	44 48	31 35	4 6	"		26 9	LOCAL FLOW, NAT FLOW	VM
1500 2200	79		82	76	51 44	28 30	8 10	"		52 15	LOCAL E / NAT	SS
1600 2300			68	75	50 38	31 26	11 7	"		1	Low Demand	SS
1700 0000			97	83	42 45	33 28	7 15	"		1	Low Demand	LM
1800 0100			84	92	51 33	43 42	6 2	"		1	Low Demand	JY
1900 0200			88	87	44 35	43 36	4	"		1	Low Demand	JR
2000 0300			69	62	27 32	36 23	2	"		1	Low Demand	JR
2100 0400			65		39 26	—				1	Low Demand	MY
2200 0500												

PMS SUMMARY

Number of Measurement Hours: 3

Totals for Measurement Hrs: 280 ACTUAL — 312 EPS = 627 DAILY PA

21 A/c
20 AVG   LOWEST 45

JFK ... 3
MLFIO ... 9

TABLE A-4
(Concluded)

TYPES OF CAUSAL FACTORS AFFECTING PERFORMANCE AND/OR DELAYS		QUICK REFERENCE
FACTOR	SPECIFY	COLUMN 1. TIME, Local and Greenwich Meantime (GMT)
WEATHER	Below minimums, surface winds (tail/cross) fluctuating wind, rvr chd (loose, ice, plowing, sanding) thunderstorms.	COLUMN 2. Performance Index (PI) a percentage determined by dividing the actual operations by the Engineered Performance Standard (EPS) which calculate with the runway configuration (PI = Column 6 divided by Column 3)
CONSTRUCTION	Maintenance or construction causing limitation to runway in use. Taxiway constriction.	COLUMN 3. EPS, Expected l/ away capacity (departures and arrivals)
NOISE	Abatement procedures imposed, causing runway change	COLUMN 4. TOTAL ACTUALS the number of arrivals and departures including VFR. Also indicated in parentheses the number of VFR aircraft handled during that hour.
AIRPORT SATURATION	Gates/penalty boxes saturated depart apron.	COLUMN 5. MODIFIED DEMAND. Official Airline Guide (OAG) Schedule of Air Taxi/Air Carrier (Column 7 AT/ACT) plus the Actual General Aviation/Military (Column 8 GA/MIL)
EQUIPMENT OUTAGES	FAA equipment out of service (total or failure). Partial outage under particular air conditions may restrict.	COLUMN 6. ACTUALS the actual traffic handled, arrivals and departures tabulated separately.
AIRCRAFT DISRUPTION	Inter-copy problem, fuel counts, inbore sua, lost ac/ft, blocked rwy/taxiway.	COLUMN 7. OAG SCHED. Scheduled Air Carrier & Air Taxi operations extracted from Official Airline Guide & provided by ATCSCC.
EMERGENCY	Disruption due to emergency procedures giving priority to ac/ft in distress, etc.	COLUMN 8. ACTUAL GA/MIL, the General Aviation & Military operations handled and tabulated separately.
VOLUME	When demand rate is in excess of capacity and no other cause applies.	COLUMN 9. Runway Configuration, all runways in use (Arrival/Departure)
UNKNOWN	Generally used when no main factor known. Remark requires follow-up action.	COLUMN 10. DELAYS, reportable arrival & departure delays (separately tabulated) average number of delay minutes & number of aircraft delayed.
OTHER	Specify	COLUMN 11. FACTOR related to performance & causes for delays. Remarks pertinent to delays or performance. Show causes when PI is under 95. (See types of causal factors).
NOTE: Report "No demand" when actual operations are less than 95% of EPS with no reportable delays during measurement hours.		COLUMN 12. INITIALS of the employee recording data.
		COLUMN 13. TIME, Local and GMT.
		COLUMN 14. WEATHER, hourly sequence, specify IFR or VFR preceding the report. Significant special weather reports affecting the operation should be reflected in additional remarks.

TIME LOCAL	GMT	IFR OR VFR	WEATHER HOURLY SEQUENCE
0700			
0800			
0900	16Z	✓	15 SCT M23 OVC10 1106
1000			
1100	19Z	✓	17 SCT E 25 OVC N 10 3206
1200			
1300	20Z	✓	20 SCT F 28 SKU 10 3111
1400	21	✓	CCR 10 2710
1500	22	✓	CLR 15 3214
1600			
1700			
1800			
1900			
2000			
2100			
2200			

ADDITIONAL REMARKS

A-6

APPENDIX B

REFERENCES

1. U.S. Government Printing Office, Report of Department of Transportation Air Traffic Control Advisory Committee, Volume 1, Washington, D.C., December 1969.

2. Willett, F.M., The 1972 Los Angeles Basin Standard Air Traffic Model, FAA-RD-73-90, Federal Aviation Administration, Washington, DC, September 1973.

3. Cohen, S. and F. Maginnis, Statistical Summary of the 1982 Los Angeles Basin Standard Traffic Model, MTR-6387, The MITRE Corporation, McLean, Virginia, April 1973.

4. Mundra, A. D., Advanced Air Traffic Management System B: 1995 Los Angeles Basin Traffic Model, MTR-6419, The MITRE Corporation, McLean, Virginia, March 1974.

5. Harman, W. H., Air Traffic Density and Distribution Measurements, ATC-80, Lincoln Laboratories, Lexington, Massachusetts, May 1979.

6. Mundra, A. D., A Los Angeles Basin 1100 Aircraft Traffic Model, MTR-80W329, The MITRE Corporation, McLean, VA, January 1981.

7. U.S. Department of Transportation, OSEM Technical Letter Report, EM-82-1-LR, Federal Aviation Administation, Office of Systems Engineering Management, Washington, D.C. July 1982.

8. Wells, W. I., Verification of DABS Sensor Surveillance Performance (ATCRBS Mode at Typical ASR Sites Throughout CONUS, ATC-79, Lincoln Laboratory, Lexington, Massachusetts, December 1977.